




ADVANCED PHOTONICS
LONG RANGE TACTICAL
THERMAL BINOCULARS
UNITEC-LR6B

GSCI Advanced Photonics thermal binoculars UNITEC-LR6B are designed for a wide range of applications for professional users, and provide them with an unrivaled advantage during day and night operations in detecting, observing and engaging targets.

The UNITEC family incorporates the latest infrared technology, electronics and the highest quality optical components to deliver best in class performance and reliability. All model variations produce superior infrared imagery, ensuring target recognition and engagement at the maximum possible range, while preserving the legacy format, features and options.

The new members of the legendary UNITEC family are based on 12-micron uncooled VOx sensor and are built for plug-and-play applications, with increased detection and recognition capabilities and the comfort of distortion-free long-eye relief. Answering our customers calls for simplicity paired with high quality – turn it on, point, and the possibilities are limitless.

ADVANTAGES OF UNITEC-LR6B

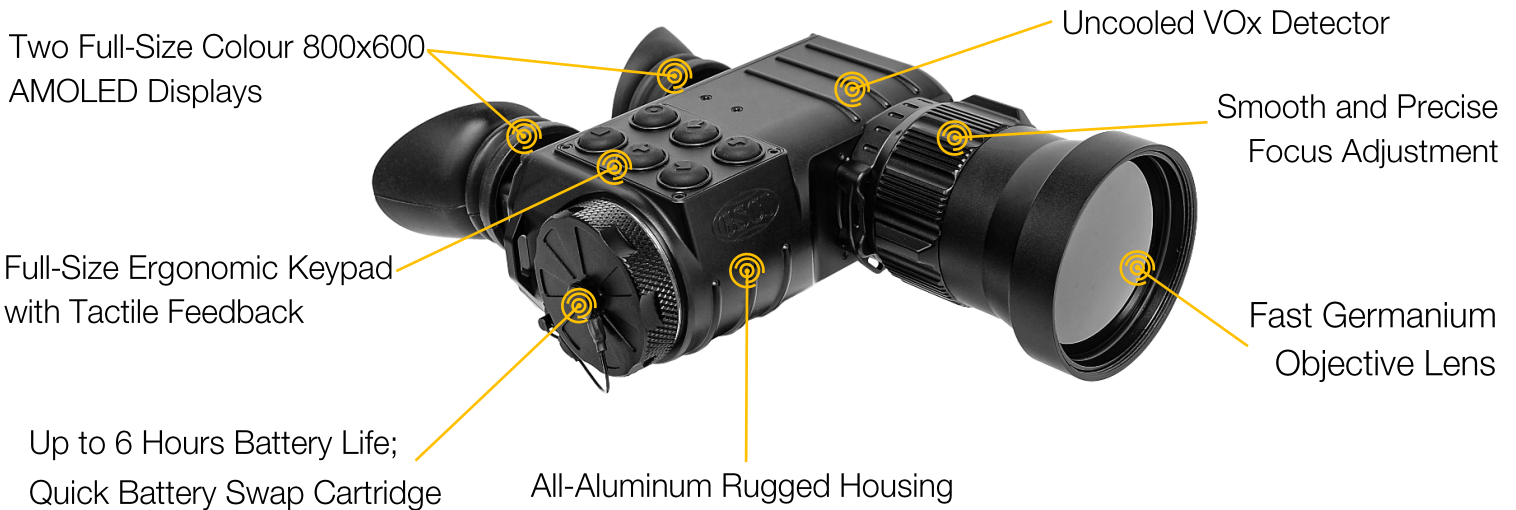

- KEY FEATURES**
- ◆ Fast 75mm Objective Lens
 - ◆ Auto-NUC FPA: 640x512
 - ◆ Up to 6 Hours Battery Life
 - ◆ ITAR-Free System

- MAIN APPLICATIONS**
- ◆ Perimeter Security
 - ◆ Law Enforcement
 - ◆ Border Patrol
 - ◆ Tactical Surveillance



Designed, Developed, Manufactured by GSCI Advanced Photonics
120 WHITMORE ROAD, UNIT 20, WOODBRIDGE, ONTARIO, L4L6A5, CANADA
WWW.GSCI.NET | GSCI@GSCI.NET | +1.905.850.0990

DISCLAIMER. Technical description, certain optical-electronic-mechanical features of the product shown herein and/or some of its parts/components may not precisely represent the actual device and are subject to change without prior notice by the sole discretion of General Starlight Co., Inc. Mass of the product represents measurable weight of all components this product consists of, such as optics, mechanics, and electronics. Dimensions of the product represents measurable size of the body, including all optical components attached and in fully folded position. Dimensions of additions such as mounting brackets, eyecups, objective lens covers, and/or battery extensions may vary and therefore are not listed herein. Copyright © 1992-2024 General Starlight Co., Inc. Canada. All rights reserved.



ADVANCED PHOTONICS
LONG RANGE TACTICAL
THERMAL BINOCULARS
UNITEC-LR6B

UNITEC-LR6B TECHNICAL DATA

Optical Magnification	4.25X
Objective Lens System	75mm
Field of View	5.8° x 4.3°
Focusing Range	2m .. Infinity
Eyerelief	> 20mm
FPA Type	Uncooled VOx Detector
FPA Resolution and Pitch	640x512, 12µm
FPA Sensitivity (NETD)	<40mK
FPA Refresh Rate	50Hz
Digital Zoom	1X, 2X, 4X
Internal Display	Large Size: 0.5-Inch Diagonal, Dual-AMOLED, Colour, 800x600
Imaging Modes	Monochrome (White-Hot / Black-Hot) and 4 Colour Palettes
Digital Passive Stadiametric Rangefinder (SRF)	Yes
Digital Detail Enhancement Feature (DDE)	Yes
Signal Noise Reduction (SNR)	Yes
Stow Safety Feature (SSF)	Yes
Integrated 9-Axis Absolute Orientation HUD (Heads-Up Display)	Optional: 3-Axis Sensors - Magnetometer, Accelerometer and Gyroscope
Integrated Compass	Optional
Pitch / Roll / Azimuth Indications	Optional
Real-Time Date-Time Stamp	Yes: Simplified, Extended, DTG Formats
Detection Capability: Man (1.7x0.5m) / NATO Target (2.3x2.3m)	3540m / 4785m
Recognition Capability: Man (1.7x0.5m) / NATO Target (2.3x2.3m)	1325m / 1790m
Identification Capability: Man (1.7x0.5m) / NATO Target (2.3x2.3m)	705m / 950m
Hand-Held Configuration	Yes
Tripod-Mountable	Yes
User Profiles (Configurable)	Yes
Reset to Factory Defaults	Yes
Automatic Power Down Control	User-Configurable: 10 .. 60 minutes of inactivity
Accepted Batteries	4 (four) AA of Any Type: Lithium / Rechargeable
Universal Port	Video-Out, Remote Control and External Power (4VDC .. 15VDC)
Battery Life on 4x AA	Up to 6 Hours
Environmental Protection	Fully Waterproof, Nitrogen-Purged Housing
Dimensions	181 x 142 x 71 mm
Weight	700 grams
Operating Temperature	-40°C .. +55°C
Warranty	7 Years, Limited
Made In Canada	ITAR-Free

* Batteries not included

DISCLAIMER: Technical description, certain optical-electronic-mechanical features of the product shown herein and/or some of its parts/components may not precisely represent the actual device and are subject to change without prior notice by the sole discretion of General Starlight Co., Inc. Mass of the product represents measurable weight of all components this product consists of, such as optics, mechanics, and electronics. Dimensions of the product represents measurable size of the body, including all optical components attached and in fully folded position. Dimensions of additions such as mounting brackets, eyecups, objective lens covers, and/or battery extensions may vary and therefore are not listed herein. Copyright © 1992-2024 General Starlight Co., Inc. Canada. All rights reserved.



ADVANCED PHOTONICS
LONG RANGE TACTICAL
THERMAL BINOCULARS
UNITEC-LR6B

STANDARD EQUIPMENT: WHAT'S IN THE BOX

1	Thermal Imaging Binoculars
2	Rubber Eyecups (<i>Attached, 2pcs</i>)
3	Front Lens Protective Cover (<i>Attached</i>)
4	USB Power Cable
5	Video-Out Cable
6	Quick Swap Battery Containers (<i>AA-Type, 4pcs</i>)
7	Soft Carrying Pouch
8	Neck Cord
9	User Manual
10	Waterproof Hard Carrying Case
11	Cleaning Kit (<i>3-in-1 Multi-Pen + Cleaning Cloth</i>)

* Batteries not included

OPTIONAL EQUIPMENT

A	Universal Remote Control Unit TRC-120 (<i>Comes with connection cable</i>)
B	Universal Multi-Voltage Battery Pack MVP-240™-240 (<i>Comes with connection cable</i>)
C	External Digital Video Recorder GS-EDVR (<i>Comes with set of cables and 32GB SD card</i>)
D	HMD-800-MOD Heads Up Display (<i>streams video directly from the unit</i>)
E	MTAR™-HUD Advanced Heads Up Display (<i>streams video directly from the unit; equipped with built-in DVR, GPS and Integrated 9-Axis Absolute Orientation HUD</i>)
F	Integrated 9-Axis Absolute Orientation HUD (Heads-Up Display): 3-Axis Sensors for Compass Reading, Inclinometer/ Pitch Reading, and Level/Roll Reading



Designed, Developed, Manufactured by GSCI Advanced Photonics
 120 WHITMORE ROAD, UNIT 20, WOODBRIDGE, ONTARIO, L4L6A5, CANADA
 WWW.GSCI.NET | GSCI@GSCI.NET | +1.905.850.0990

DISCLAIMER. Technical description, certain optical-electronic-mechanical features of the product shown herein and/or some of its parts/components may not precisely represent the actual device and are subject to change without prior notice by the sole discretion of General Starlight Co., Inc. Mass of the product represents measurable weight of all components this product consists of, such as optics, mechanics, and electronics. Dimensions of the product represents measurable size of the body, including all optical components attached and in fully folded position. Dimensions of additions such as mounting brackets, eyecups, objective lens covers, and/or battery extensions may vary and therefore are not listed herein. Copyright © 1992-2024 General Starlight Co., Inc. Canada. All rights reserved.